


Layer in PDF output

PDF layer can be specified by `axf:layer-settings` and `axf:layer`. Specify the layer setting like `axf:layer-settings="layer1,layer2"` in `fo:root` and specifies in which layer the area is specified like `axf:layer="layer1"`. The features which can be specified are view, print, export, locked and lang. The initial state of on/off can be specified to view, print and export. locked locks a layer. lang specifies a language. The layer settings are effective only with PDF 1.5 or later. In this sample, `<axf:document-info name="pagemode" value="UseOC" />` is specified so that the layer panel can be shown when opening the document.

Example of layer setting

Example of defining layer1, layer2, layer3 and arranging the layer to `fo:block-container`.

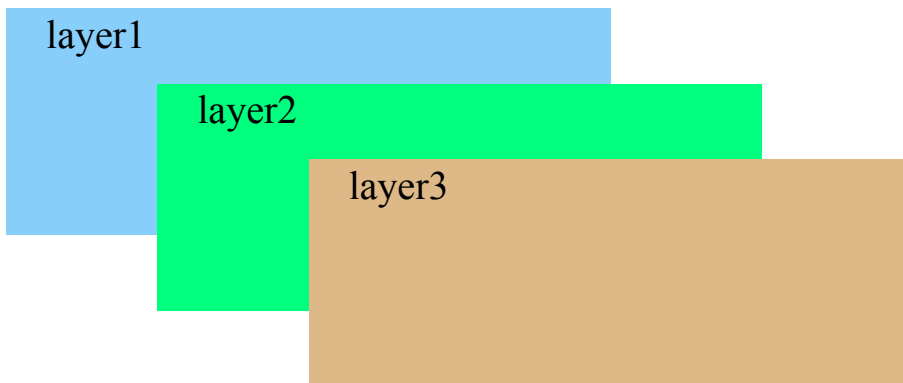


Example of defining layer4 by `[layer4 view off]` and hiding the layer as default.

Example of defining layer5 by `[layer5 view on print off]` and showing the layer but hiding it when printing.



Example of defining layer6, defining layer7 to the arranged `fo:block` in `fo:block-container` and arranging it. If layer6 is hidden, then layer7 can also be hidden.

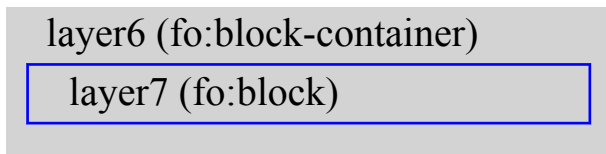

Example of defining layer8 by `[layer8 view on lang en locked on]`, specifying English as the language, specifying the layer to be locked.

